



Sylmasta Pipe Repair & Maintenance

**Pipe Repair - Metal Rebuilding - Concrete Repair
Sealing - Protection - Underwater Repair**





Sylmasta pipe repair and maintenance products are proven, cost-effective solutions used around the world to keep plant and equipment running.

Continued product testing and the highest quality formulations ensure that we produce the best quality products for the application.

Many of our pipe and leak repair systems have been independently tested to the requirements laid down by BS 6920 and have achieved WRAS approval, meaning that they are safe for use on drinking water and conform to Regulation 31 of The Water Supply (Water Quality) Regulations, Small Surface Area Contact Ratio Product Types - Section 4(b).

With the benefit of many years of application knowledge, Sylmasta products can be used to make repairs which meet the ASME standard PCC-2 401 and 402 - Non-Metallic Composite Repair Systems, including Appendix 401-III, Short-Term Pipe Spool Survival.

Sylmasta is also ISO 9001 accredited, demonstrating our dedication to high standards of consistency and quality. We are committed to continued, application-led product research and we can provide fast, customised solutions to meet specific user needs at short notice.

Sylmasta are committed to:

- 1. Uncomplicated solutions which work**
- 2. Short lead times**
- 3. Strong technical support**



Sylmasta Ltd (UK)
Halland House
Lewes Road, Scaynes Hill
Rh17 7PG, United Kingdom

Telephone
+44 (0) 1444 831459

Email
sales@sylmasta.com

Web
www.sylmasta.net
www.sylwrap.com

 sylmasta

 sylmasta



Contents

SylWrap Pipe Repair Solutions

Emergency leaks repair from one-off kits to professional Contractor Cases for multiple repairs, and SylWrap Pipe Refurbishment System to restore old and damaged pipework back to design strength.

Metal, Concrete and Underwater Repair

Give years more life to plant and equipment, rebuild and restore concrete footings, even make repairs underwater, using Sylmasta epoxy putties, pastes and coatings.

Heavy Duty Equipment Protection

Protect and extend the lifespan of equipment in the harshest of environments, including mines and quarries, protect against impact and abrasion, reline and protect pumps transporting abrasive fluids.

Pack & Seal Non-Setting Sealant

Non-setting sealant to protect sensitive equipment from dust and water ingress and to seal gaps around pipe and cable runs.

SYLWRAP

Pipe Repair Solutions

1. Leak Repair Kits

SylWrap pipe leak repair kits enable anyone to make an emergency pipe leak repair in under 30 minutes, even when flow cannot be turned off.

Range of kits from single-use to professional Contractor Cases:

- Online single repair
- Offline single repair
- Contractor kits - multiple repairs

2. Pipe Refurbishment System

SylWrap Pipe Refurbishment System enables anyone to restore pipework back to its original specification, using a simple 4 stage process involving easily-applied products:

- Leak Sealant
- Damage Repair
- Surface Protection
- Composite Wrap

SYLWRAP LH

The only low free diisocyanate moisture-cured pipe repair

The LH stands for “Low Hazard”

In August 2023, EU and UK REACH legislation came into force governing the safe use of products containing diisocyanates. The new rules led Sylmasta to develop **SylWrap LH** – a moisture-cured pipe repair wrap with <0.1% free diisocyanate, making pipe repairs safe and compliant with legislation.

This makes Sylmasta the only company in the world producing low free diisocyanate polyurethane resin based composite wraps. It is a direct benefit of Sylmasta’s intensive research and continuous products development, in bringing the latest polymer technology to market.

Sylmasta is currently moving all standard SylWrap pipe repair kits over to the new formulation - look out for the **LH** on the packaging.



SYLWRAP Leak Repair Kits

For larger pipe diameters or for large areas of pipework, see Sylmasta Pipe Refurbishment System

NP Offline Pipe Repair Kit



Single use, permanent leak repair kit for offline leaks in under 30 minutes. Safe for drinking water.

NP Standard Pipe Repair Kit

NP Kits are available in several kit sizes for repairs from 15mm - 600mm

Each kit contains:

- Superfast Steel Putty - seals offline leaks
- SylWrap HD - protects and finishes repair



UP Online Pipe Repair Kit



Single use, permanent leak repair kit for online and offline leaks in under 30 minutes. Safe for drinking water.

UP Universal Pipe Repair Kit

UP Kits are available in several kit sizes for repairs from 15mm - 600mm

Each kit contains:

- Superfast Steel Putty - seals offline leaks
- Wrap & Seal - stops online leaks
- SylWrap HD - protects and finishes repair



PRO Contractor Case



Multi use kit, for professional users, makes permanent online and offline leak repairs in under 30 minutes. Safe for drinking water.

PRO Contractor Case

PRO Kits are available in several kit sizes for repairs from 15mm - 600mm

Each kit contains:

- Large superfast Steel Putty
- Multiple Wrap & Seals
- Multiple SylWrap HDs



Cast Iron Pipe Repair Kit



Repairs cracked cast iron drainage pipework, even when wet.

CAST Cast Iron Repair Kit

CAST Kits are available in kit sizes to match standard cast iron pipe diameters

Each kit contains:

- Superfast Steel Putty - repair small holes
- CrackSeal - seals long cracks
- SylWrap HD - protects and finishes repair



SYLWRAP Pipe Refurbishment System

Stage 1 Leak Sealant



Permanently seal leaking pipework for both offline and online leaks

Superfast Steel Putty

- Fast, high strength leak sealant
- Offline leaks
- WRAS approved for drinking water
- Sets in 5 minutes
- 90% strength in 60 minutes

Superfast Aqua PW Putty

- Wet surface leak sealant
- Offline leaks
- WRAS approved for drinking water
- Sets in 20 minutes
- 90% strength in 2 - 3 hours

Wrap & Seal

- Pipe burst tape
- Stops online leaks
- Instant strength
- WRAS approved for drinking water

CrackSeal

- Seals cracks in cast iron
- Wet surface application
- Low and no pressure applications
- Instant seal, sets in 24 hours

Stage 2 Reprofile



Fill damage and removes sharp angles ahead of wrapping

AB Original Rebuilding Putty

- Rebuilds extensive damage
- Reinforces around pipe supports
- 2 hour working time
- Hand applied

Industrial Metal Restoration Paste

- Fills extensive damage and pitting
- 60 minute working time
- Applied by filling knife



Stage 3 Surface Coating



Protect against corrosion and remove surface imperfections

Liquid Metal

- High build coating
- Protects against corrosion
- Fills small surface imperfections
- Helps block future breakthrough
- 60 minute working time
- Brush applied

Stage 4 Composite Wrap



Restore pressure resistance and protect repair with composite wrap

SylWrap HD Heavy Duty

- Heavy duty composite repair
- Reinforces leak sealant
- Restores hoop strength
- Protects against external damage
- Added corrosion inhibitors
- Moisture activated
- Sets in 10 minutes
- WRAS approved for drinking water
- Tested to meet ASME PCC-2 standard

SylWrap SC Super-Conformable

- Conforms to difficult geometries
- Reinforces leak sealant
- Protects against external damage
- Added corrosion inhibitors
- Moisture activated
- Sets in 10 minutes
- WRAS approved for drinking water

SYLWRAP Online Pipe Repair Calculator



The SylWrap Pipe Refurbishment System is supported by a suite of comprehensive online calculators to help users specify the material requirements for their repair application.

The calculator can be found at the bottom of this web page by following the link or scanning the QR code:

www.sylwrap.com/sylmasta-pipe-repair-system/

Contents	
Sylmasta Pipe Refurbishment System - Comprehensive Calculator	>
ASME PCC-2 Compliant Pipe Repair Calculator	>
ASME PCC-2 Repair System Quality Control Form	>
Wrap & Seal Pipe Burst Tape Calculator	>
SylWrap HD Wrapping Coverage Calculator	>
Protective Coatings Coverage Calculator (Liquid Metal, Ceramic Brushable, WearShield)	>
About Sylmasta Calculator & Disclaimer	>

< Contents	Sylmasta Pipe Refurbishment System - Calculator	Next >
Use this calculator to specify the design and material requirements when making repairs using the Sylmasta Pipe Refurbishment System.		
Calculations can be made for leaks, surface profiling, protective coating and SylWrap composite wrapping.		
<i>This calculator serves only as an initial guide and judgement should be made on the exact repair based upon all conditions.</i>		
PLEASE ENTER PIPE DETAILS		
Outside Diameter (mm)		100
Length to Wrap (mm) (leave blank for leak repair)		—
Pressure (bar)		15
Safety Factor		2 ▾
STAGE 1 - Leaking?		☒
<i>If there is a leak in the pipe then a Primary Leak Sealant will be required (more info)</i>		
STAGE 2 - Repair Surface Damage?		☐
<i>If the surface of the pipe is damaged and pitted then the defects will need to be repaired to restore the surface profile. (more info)</i>		
STAGE 3 - Use Liquid Metal Primer?		☒
<i>Liquid Metal is recommended to provide a layer of corrosion protection and provide a barrier against future leaks. Apply it as a primer coat before wrapping with SylWrap. (more info)</i>		
STAGE 1 - PRIMARY SEALANT CALCULATOR		
Can Flow Be Stopped?		☒
Size of Hole (mm)		2
Diameter Putty Repair (mm)		52
Putty Required (g)		28.43

STAGE 4 - SYLWRAP REQUIREMENTS	
Change SylWrap Size?	☐
SylWrap Size	SYL616HD
No. Layers	10
Change Layers	☐
Repair Length (mm)	177
No. SylWraps Required	2
SUMMARY OF MATERIAL REQUIREMENTS	
Epoxy Putty (g)	29
Diameter of Putty Repair (mm)	52
Liquid Metal (kg)	0.07
SylWrap Size	SYL616HD
No. SylWrap	2
SEND REPORT	
Please enter your details below to send calculator results to your inbox.	
Your Email Address sales@sylmasta.com	
Name John Smith	
Company Sylmasta Ltd	
Telephone Number 01444 831459	
Please contact me for help with my repair	☒
Please leave a message describing your repair The pipe is made from mild steel and suffering from external corrosion.	
Email report	



Metal, Concrete and Underwater Repair

Metal Repair Putties



Hand mixed and applied repair putties for rebuilding and filling damage to metal components.

Superfast Steel Putty

- Fast, high strength repair putty
- For repairs to ferrous metals
- Easy to use putty stick format
- WRAS approved for drinking water
- Sets in 5 minutes
- 90% strength in 60 minutes

Superfast Aluminium Putty

- Fast, high strength repair putty
- For repairs to alloys
- Easy to use putty stick format
- Sets in 5 minutes
- 90% strength in 60 minutes

Superfast Copper Putty

- Fast, high strength repair putty
- For repairs to copper and its alloys
- Easy to use putty stick format
- Sets in 5 minutes
- 90% strength in 60 minutes

Superfast Titanium HT Putty

- High temperature repair putty to 200°C
- For repairs to all metal surfaces
- Easy to use putty stick format
- Sets in 8 hours
- Full strength in 24 hours

Metal Repair Pastes



Metal repair pastes for repairing extensive damage, rebuilding parts and restoring worn shafts. Applied using filling knife.

Industrial Metal

- High strength epoxy repair paste
- Easily machined
- 60 minute working time
- Full strength in 8 hours

Industrial Metal Rapid

- High strength epoxy repair paste
- Easily machined
- 5 minute working time
- 90% strength in 60 minutes

Titanium Supergrade HT

- High temperature resistance to 250°C
- High compressive strength for shaft repair
- 2- 3 hour working time
- Full strength in 24 hours

Ceramic Supergrade

- Ceramic filled for high abrasion resistance
- Ideal for repairing worn pump impellers
- 60 minute working time
- Full strength in 24 hours

Metal Repair Coatings



Brush applied epoxy repair coatings to protect machinery against corrosion or abrasive environments.

Liquid Metal


- Corrosion resistant metal coating
- High thickness per coat
- 30 - 45 minute working time
- Full strength in 8 hours

Ceramic Brushable

- Abrasion resistant coating
- Ceramic-filled for maximum hardness
- Available in Blue and Green
- 30 - 45 minute working time
- Full strength in 8 hours

Sylmasta Metal Repair compounds are available in the Sylmasta Metal Repair Kit containing putties, pastes and coatings to cover all repairs.

Concrete & Wet Surface

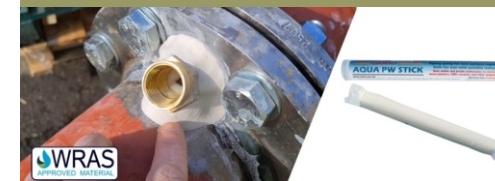

Rebuild damaged and cracked concrete, such as conveyor footings in mines. Make repairs to wet surfaces or underwater.

Superfast Aqua PW Putty Stick

- Fast wet surface and underwater repairs
- Easy to use putty stick format
- WRAS approved for drinking water
- Sets in 10 - 20 minutes
- 90% strength in 2 - 3 hours

AB Original Repair Putty

- Long working time for large repairs
- Rebuilds damaged concrete or metal
- Can be applied underwater
- Easy to use large putty stick format
- 1 - 2 hours working time
- Full strength in 24 hours

AB Original Repair Paste

- Formulated to rebuild concrete footings
- Restores damaged concrete or metal
- Can be used on wet surfaces
- Easily mixed by hand
- 1 - 2 hours working time
- Full strength in 24 hours





Heavy Duty Equipment Protection

WearShield High Build



Alumina bead filled wear compound for ultimate heavy duty protection to equipment in mines and other harsh environments

WearShield Rapid

- Fast setting for minimum downtime
- Can be used for patch repairs
- High build: >5mm per application
- High impact resistance
- Easy to mix
- Sets in <10 minutes
- 90% strength in 60 minutes

WearShield Standard

- Long working time
- High build: >5mm per application
- Good impact resistance
- Easy to mix
- 60 minute working time
- 90% strength in 8 hours

WearShield HT

- Dry temperature resistance to 200°C
- High build: >5mm per application
- Long working time
- Easy to mix
- 2 - 3 hour working time
- 90% strength in 12 hours
- Full strength in 24 hours



Ceramic Brushable



Ceramic filled epoxy coating to provide added low-friction finish to WearShield, such as when relining pumps

Ceramic Brushable

- Abrasion resistant coating
- Gives WearShield ultra smooth finish
- Ceramic-filled for maximum hardness
- Available in Blue and Green
- 30 - 45 minute working time
- Full strength in 8 hours

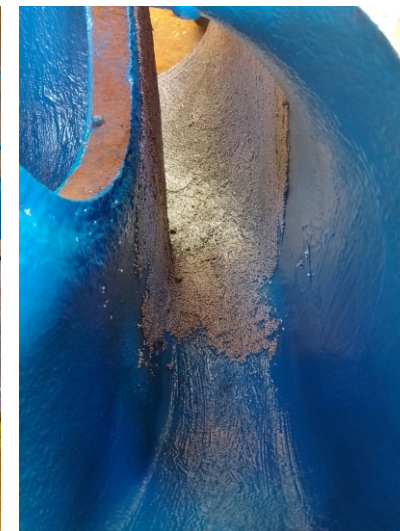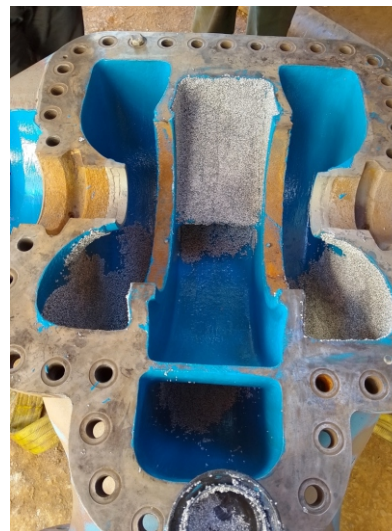



Pack & Seal Non-Setting Sealant

Pack & Seal Red




Non-setting single-part putty for filling gaps around cable and pipe runs, with added flame retardants

Pack & Seal Red

- Fill gaps around cable and pipe runs
- Contains flame retardants
- Easily removed at a later date

Pack & Seal Clear

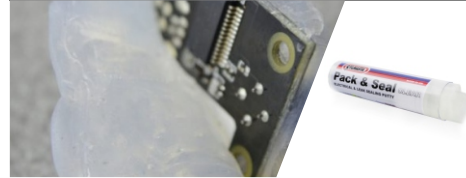

Non-setting translucent putty for sealing electrical boxes against water and dust, whilst still allowing condition inspection

Pack & Seal Clear

- Pack out electrical boxes
- Protects against dust and liquid ingress
- Semi-transparent to enable inspection
- Easily removed at a later date



Pack & Seal Clear can be polished with a finger to become optically clear



Products List

SylWrap Leak Repair Kits

SylWrap NP Standard Pipe Repair Kits (Single Use)		SylWrap UP Universal / Live Leak Kits (Single Use)		SylWrap CAST Cast Iron Pipe Repair Kits		
<i>(Contains Superfast Epoxy Putty, SylWrap)</i>		<i>(Contains Wrap & Seal, Epoxy Putty, SylWrap)</i>		<i>(Contains CrackSeal, Epoxy Putty, SylWrap)</i>		
Code	Pipe Diameter	Code	Pipe Diameter	Code	Pipe Diameter	Includes:
SYL-106-NP	< 15mm	SYL-106-UP	< 15mm	SYL-CAST-32-150	32 – 150mm	2 x CrackSeal, 4 sizes of SylWrap
SYL-206-NP	15 – 25mm	SYL-206-UP	15 – 25mm	SYL-CAST-32-50	32 – 150mm	1 x CrackSeal, SYL312HD
SYL-212-NP	25 – 50mm	SYL-212-UP	25 – 50mm	SYL-CAST-68-75	68 – 75mm	1 x CrackSeal, SYL416HD
SYL-309-NP	25 – 50mm	SYL-309-UP	25 – 50mm	SYL-CAST-100	100mm	1 x CrackSeal, SYL616HD
SYL-312-NP	25 – 50mm	SYL-312-UP	25 – 50mm	SYL-CAST-150	150mm	1 x CrackSeal, SYL633HD
SYL-412-NP	50 – 100mm	SYL-412-UP	50 – 100mm			
SYL-416-NP	75 – 125mm	SYL-416-UP	75 – 125mm			
SYL-616-NP	100 – 150mm	SYL-616-UP	100 – 150mm			
SYL-430-NP	125 – 250mm	SYL-430-UP	125 – 250mm			
SYL-633-NP	150 – 300mm	SYL-633-UP	150 – 300mm			
SYL-866-NP	300 – 600mm	SYL-866-UP	300 – 600mm			

SylWrap PRO Contractor Cases (Multiple Pipe Repairs)		
<i>(Contains Wrap & Seals, Epoxy Putty, SylWraps)</i>		
Code	Pipe Diameter	SylWrap Sizes
SYL-PRO-206	15 – 25mm	6 x SYL206HD - up to 6 repairs
SYL-PRO-309	25 – 50mm	6 x SYL309HD - up to 6 repairs
SYL-PRO-412	50 - 100mm	4 x SYL412HD - up to 4 repairs
SYL-PRO-616	100 - 150mm	4 x SYL616HD - up to 4 repairs
SYL-PRO-633	150 - 300mm	4 x SYL633HD - up to 4 repairs
SYL-PRO-866	300 - 600mm	2 x SYL866HD - up to 2 repairs
SYL-PRO-15-50	15 – 50mm	3 x SYL206HD, 3 x SYL309HD
SYL-PRO-15-150	15 – 150mm	SYL206HD, SYL309HD, SYL412HD, SYL616HD
SYL-PRO-15-300	15 – 300mm	SYL206HD, SYL309HD, SYL412HD, SYL616HD, SYL633HD
SYL-PRO-25-100	25 – 100mm	2 x SYL309HD, 2 x SYL412HD
SYL-PRO-50-150	50 – 150mm	2 x SYL412HD, 2 x SYL616HD
SYL-PRO-100-300	100 – 300mm	2 x SYL616HD, 2 x SYL633HD

Products List

SylWrap Pipe Refurbishment System

Stage 1. Primary Leak Sealants

Wrap & Seal Pipe Burst Tape			Superfast Epoxy Putty Sticks			CrackSeal Pipe Sealant		
Code	Pipe Diameter	Size	Code	Name	Size	Code	Name	Size
PB-25x2HD	15 – 150mm	1mm x 25mm x 2m, Guideline	SFST-114g	Superfast Steel Stick (WRAS)	114g	CS-BLACK-310ml	CrackSeal Sealant Black	310ml
PB-50x4HD	150 – 300mm	1mm x 50mm x 4m, Guideline	SFPW-114g	Superfast Aqua PW Stick (WRAS)	114g			
PB-50x11HD	300 – 600mm	1mm x 50mm x 11m, No Guideline						

Stage 2. Reprofile

AB Original Rebuilding Putty		Industrial Metal Restoration Paste		Liquid Metal	
Code	Size	Code	Size	Code	Size
AB-STICK-WHITE-200g	200g	PST-500g	500g	PBS-500g	500g
AB-STICK-WHITE-1kg	1kg	PST-4x500g	4x500g	PBS-4x500g	4x500g
AB-STICK-WHITE-5kg	5kg	PST-2kg	2kg	PBS-2kg	2kg
AB-STICK-WHITE-10kg	10kg	PST-5kg	5kg	PBS-5kg	5kg

Stage 3. Surface Coating

Stage 4. Composite Wrap

SylWrap HD Heavy Duty			SylWrap SC Super Conformable		
Code	Pipe Diameter	Size	Code	Pipe Diameter	Size
SYL106HD	< 15mm	25mm x 1.8m	SYL206SC	15 – 25mm	50mm x 1.8m
SYL206HD	15 – 25mm	50mm x 1.8m	SYL212SC	25 – 50mm	50mm x 3.6m
SYL212HD	25 – 50mm	50mm x 3.6m	SYL309SC	25 – 50mm	75mm x 2.7m
SYL309HD	25 – 50mm	75mm x 2.7m	SYL312SC	50 – 75mm	75mm x 3.6m
SYL312HD	50 – 75mm	75mm x 3.6m	SYL412SC	50 – 100mm	100mm x 3.6m
SYL412HD	50 – 100mm	100mm x 3.6m	SYL416SC	50 – 100mm	100mm x 5.0m
SYL416HD	50 – 100mm	100mm x 5.0m	SYL420SC	50 – 100mm	100mm x 5.0m
SYL420HD	50 – 100mm	100mm x 6.0m	SYL616SC	100 – 150mm	150mm x 5.0m
SYL616HD	100 – 150mm	150mm x 5.0m	SYL633SC	150 - 300mm	150mm x 10.0m
SYL433HD	125 – 250mm	100mm x 9.0m			
SYL633HD	150 - 300mm	150mm x 10.0m			
SYL866HD	300 – 600mm	200mm x 20.0m			



Products List

Metal, Concrete and Underwater

Metal Repair Putty

Superfast Steel Stick (WRAS)		Superfast Aluminium Stick		Superfast Copper Stick (WRAS)		Superfast Titanium "High Temperature"	
Code	Size	Code	Size	Code	Size	Code	Size
SFST-114g	114g	SFAL-114g	114g	SFCOP-114g	114g	SFTI-114g	114g

Metal Repair Paste

Industrial Metal		Industrial Metal Rapid		Titanium Supergrade HT		Ceramic Supergrade	
Code	Size	Code	Size	Code	Size	Code	Size
PST-500g	500g	PSF-500g	500g	PHT-500g	500g	PCG-500g	500g
PST-4x500g	4x500g	PSF-4x500g	4x500g	PHT-4x500g	4x500g	PCG-4x500g	4x500g
PST-2kg	2kg	PSF-2kg	2kg	PHT-2kg	2kg	PCG-2kg	2kg
PST-5kg	5kg	PSF-5kg	5kg	PHT-5kg	5kg	PCG-5kg	5kg

Metal Repair Coating

Metal Repair Kit

Liquid Metal		Ceramic Brushable Blue		Ceramic Brushable Green		Sylmasta Metal Repair Kit	
Code	Size	Code	Size	Code	Size	Code	Contents
PBS-500g	500g	PBG-500g	500g	PBGR-500g	500g	PKIT01-METAL-REPAIR	PSF-1kg, PHT-1kg, SFST-114g, Fibreglass Tape, Degreaser, Release Agent
PBS-4x500g	4x500g	PBG-4x500g	4x500g	PBGR-4x500g	4x500g		
PBS-2kg	2kg	PBG-2kg	2kg	PBGR-2kg	2kg		
PBS-5kg	5kg	PBG-5kg	5kg	PBGR-5kg	5kg		

Concrete & Underwater

AB Original Repair Putty		AB Original Repair Paste		Superfast Aqua PW Putty Stick	
Code	Size	Code	Size	Code	Size
AB-STICK-WHITE-200g	200g	PAB-WHITE-5kg	5kg	SFPW-114g	114g
AB-STICK-WHITE-1kg	1kg	PAB-WHITE-10kg	10kg		
AB-STICK-WHITE-5kg	5kg				
AB-STICK-WHITE-10kg	10kg				

Products List

Heavy Duty Equipment Protection

WearShield

WearShield Rapid		WearShield Standard		WearShield HT	
Code	Size	Code	Size	Code	Size
PWEAR-RAPID-3kg	3kg	PWEAR-STANDARD-3kg	3kg	PWEAR-HT-3kg	3kg
PWEAR-RAPID-13kg	13kg	PWEAR-STANDARD-13kg	13kg	PWEAR-HT-13kg	13kg

Ceramic Brushable Blue

Ceramic Brushable Blue		Ceramic Brushable Green	
Code	Size	Code	Size
PBG-500g	500g	PBGR-500g	500g
PBG-4x500g	4x500g	PBGR-4x500g	4x500g
PBG-2kg	2kg	PBGR-2kg	2kg
PBG-5kg	5kg	PBGR-5kg	5kg

Pack & Seal

Pack & Seal Red		Pack & Seal Clear	
Code	Size	Code	Size
PS-RED-100g	100g	PS-CLEAR-100g	100g
PS-RED-500g	500g	PS-CLEAR-500g	500g
PS-RED-1kg	1kg	PS-CLEAR-1kg	1kg
PS-RED-5kg	5kg	PS-CLEAR-5kg	5kg

Surface Preparation

Non-Flammable Degreaser		Non-Flammable Release Agent		Rust Converter	
Code	Size	Code	Size	Code	Size
DEGREASER-01-500g	500g	RA02-125ml	125ml	RUST-500ml	500ml

Mixing & Application

Paste Mixing Board		Plastic Putty Knife		Plastic Card Spreader	
Code	Size	Code	Size	Code	Size
MIXING-BOARD-RED	10 pack	PUTTY-KNIFE-BLUE	10 pack	SPREADER-WHITE	10 pack



Repair & Protection

Metal, Concrete and Underwater Repair

Give years more life to plant and equipment, rebuild and restore concrete footings, even make repairs underwater, using Sylmasta epoxy putties, pastes and coatings.

Heavy Duty Equipment Protection

Protect and extend the lifespan of equipment in the harshest of environments, including mines and quarries, protect against impact and abrasion, reline and protect pumps transporting abrasive fluids.

Pack & Seal

Non-setting sealant to protect sensitive equipment from dust and water ingress and to seal gaps around pipe and cable runs.

Surface Preparation

Good surface preparation makes for the best finished repair. This range includes non-flammable degreaser, rust converter and release-agents.